

To: *Proposed Bidders*

From: Peter Taylor, Purchasing Manager

Pages 1

Date: July 20, 2022

Re: Addendum 3 RFP 22-05OPP Roof Replacement Thorburn Consolidated School

The following comprises Addendum 3 for the above tender and will form part of the tender documents:

Delete:

1. Invitation:

1.1 Bid Call

- 1.1.1 Sealed tenders clearly marked **“Roof Replacement (Sections A and B), Thorburn Consolidated School (RFP 22-05OPP)”** must be received no later than **2:00:00 p.m.** (Atlantic Daylight Time) (as per NRC Atomic Clock) on **Monday, July 25, 2022** (the “Tender Closing Date”) at the office of the Purchasing Manager noted below. The envelope is to be *clearly identified* with Bidders name and project name on the outside and contain two separate and sealed envelopes – one marked “Technical Submission” and one marked “Price Submission”.

Replace with:

2. Invitation:

1.2 Bid Call

- 1.2.1 Sealed tenders clearly marked **“Roof Replacement (Sections A and B), Thorburn Consolidated School (RFP 22-05OPP)”** must be received no later than **2:00:00 p.m.** (Atlantic Daylight Time) (as per NRC Atomic Clock) **Wednesday, July 27, 2022** (the “Tender Closing Date”) at the office of the Purchasing Manager noted below. The envelope is to be *clearly identified* with Bidders name and project name on the outside and contain two separate and sealed envelopes – one marked “Technical Submission” and one marked “Price Submission”.

The above addendum **did** require a change to the Closing Date and Time as per above.

If there is more than one (1) Addendum issued for this tender, please acknowledge each separately on your tender submission.

If your tender has already been submitted and this addendum changes your original proposal content, revised information can be emailed to tenders@ccrce.ca

If you have any questions, please advise.

Peter Taylor, Purchasing Manager
Chignecto Central Regional Centre for Education
60 Lorne Street
Truro, Nova Scotia
B2N 3K3



To: *Proposed Bidders*

From: Peter Taylor, Purchasing Manager

Pages 7

Date: July 20, 2022

Re: Addendum 2 RFP 22-05OPP Roof Replacement Thorburn Consolidated School

The following and attached six (6) drawings/plans/details comprises Addendum 2 for the above tender and will form part of the tender documents:

**PROJECT MANUAL
ARCHITECTURAL**

1. N/A.

**DRAWINGS
ARCHITECTURAL**

2. **Reference Drawing – A-101 ROOF PLAN**
2.1. **Revise tapered insulation at Roof B as indicated in Construction Photos, Roof Plan, and Details document attached.**
2.2. **Install air barrier membrane and metal cladding (on girt assembly) over existing brick veneer wall at Roof B as indicated in Construction Photos, Roof Plan, and Details document attached.**

ATTACHMENTS

Construction Photos, Roof Plan, and Details

This change did not require a revision to the Closing Date and Time.

If there is more than one (1) Addendum issued for this tender, please acknowledge each separately on your tender submission.

If your tender has already been submitted and this addendum changes your original proposal content, revised information can be emailed to tenders@ccrce.ca

If you have any questions, please advise.

Peter Taylor, Purchasing Manager
Chignecto Central Regional Centre for Education
60 Lorne Street
Truro, Nova Scotia
B2N 3K3

Install new cladding
around chimney (c/w
outside corner trims)


Edge of new cladding
(complete with
closure trim)

Install J/closure trims
at window jambs.
Install head and sill
flashings

Extend new cladding
to building corner;
terminate with
closure trim


CONSTRUCTION PHOTOS FROM PREVIOUS PHASE AT THORBURN SCHOOL


New metal cladding assembly/construction is to match previous phase

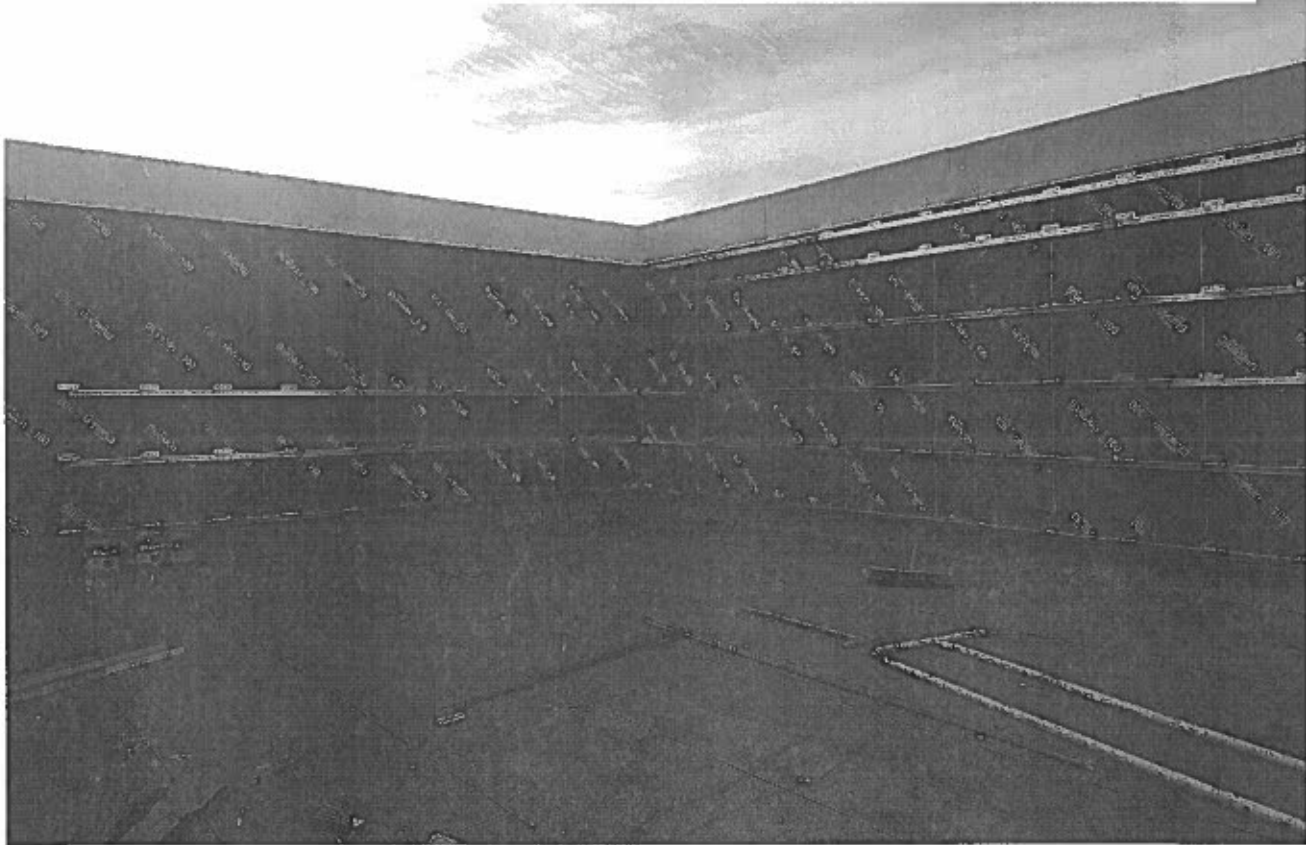

CONSTRUCTION PHOTOS FROM PREVIOUS PHASE AT THORBURN SCHOOL

New metal cladding assembly/construction is to match previous phase

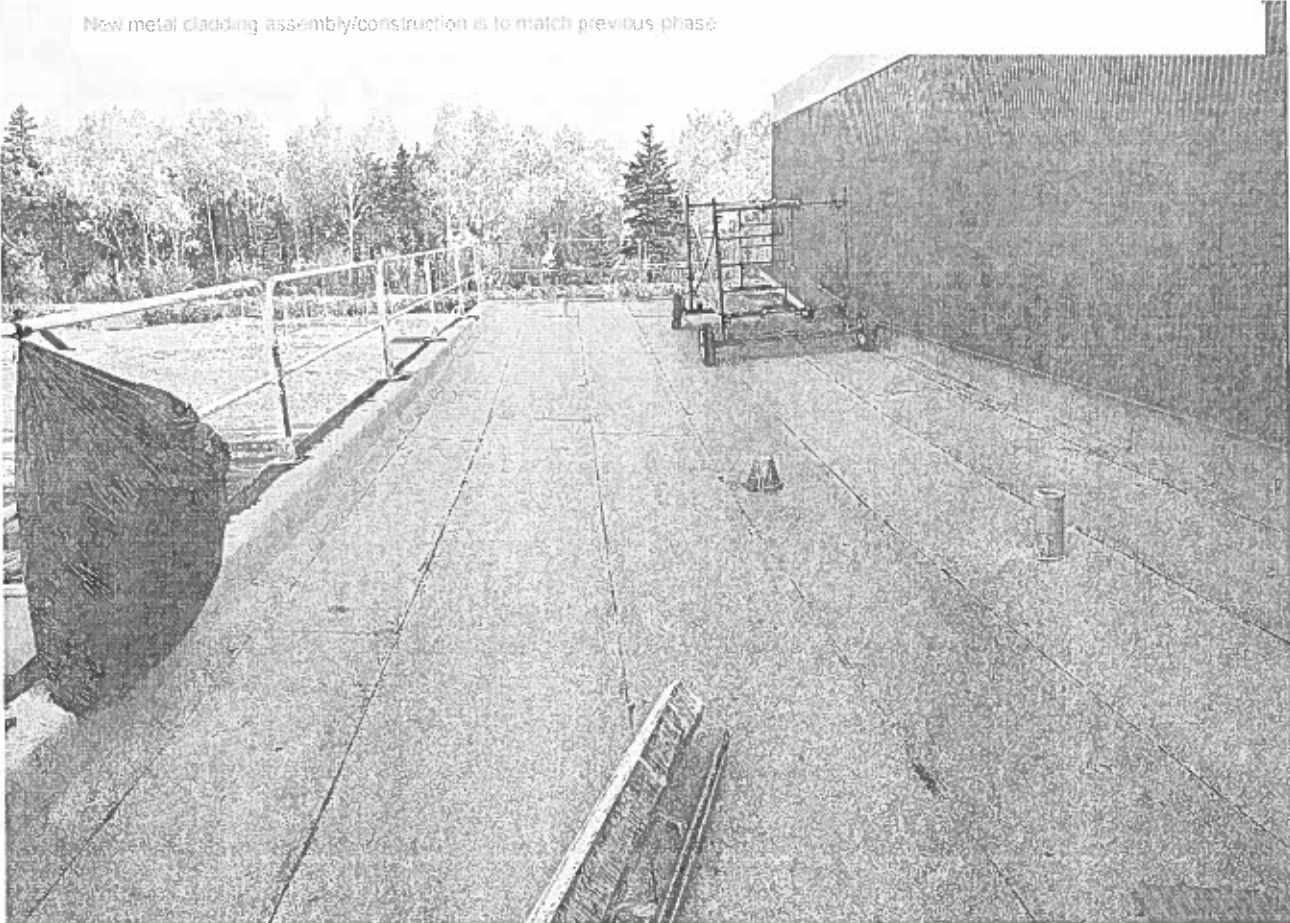

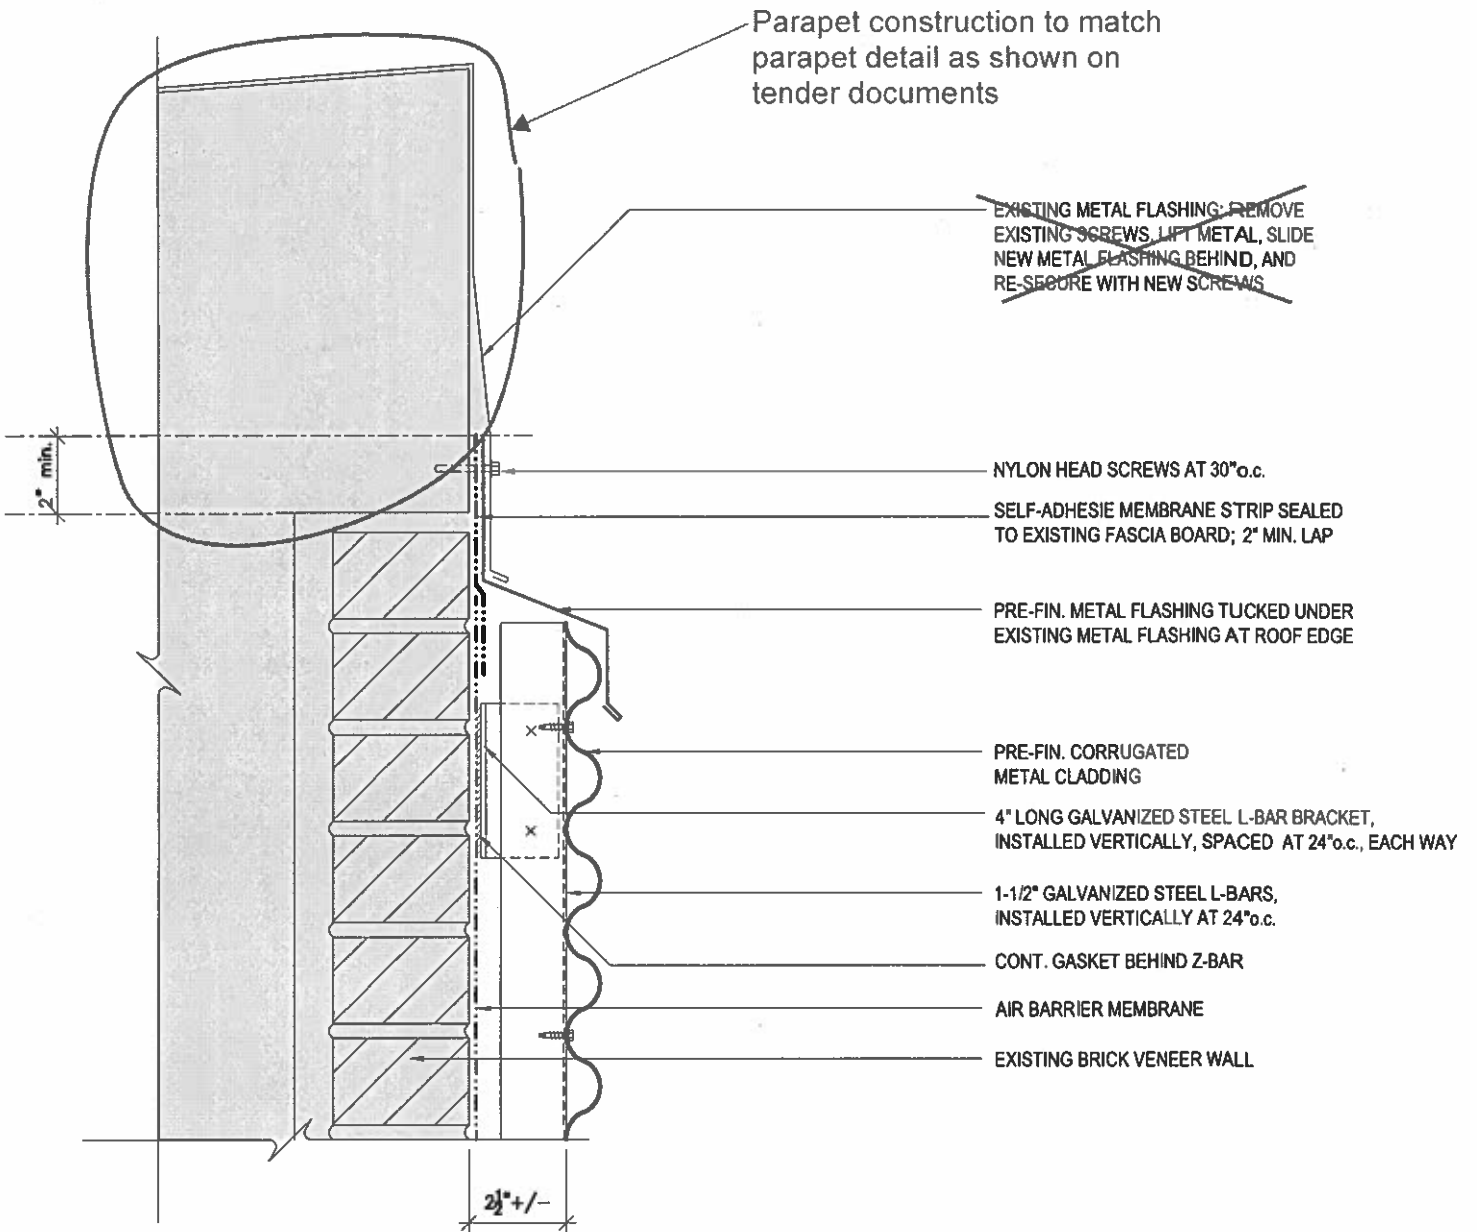


Note: This detail shows horizontal cladding on vertical girts; install vertical cladding on horizontal girts (as shown in CONSTRUCTION PHOTOS)

3

METAL CLADDING AT PARAPET

SCALE: 3" = 1'-0"

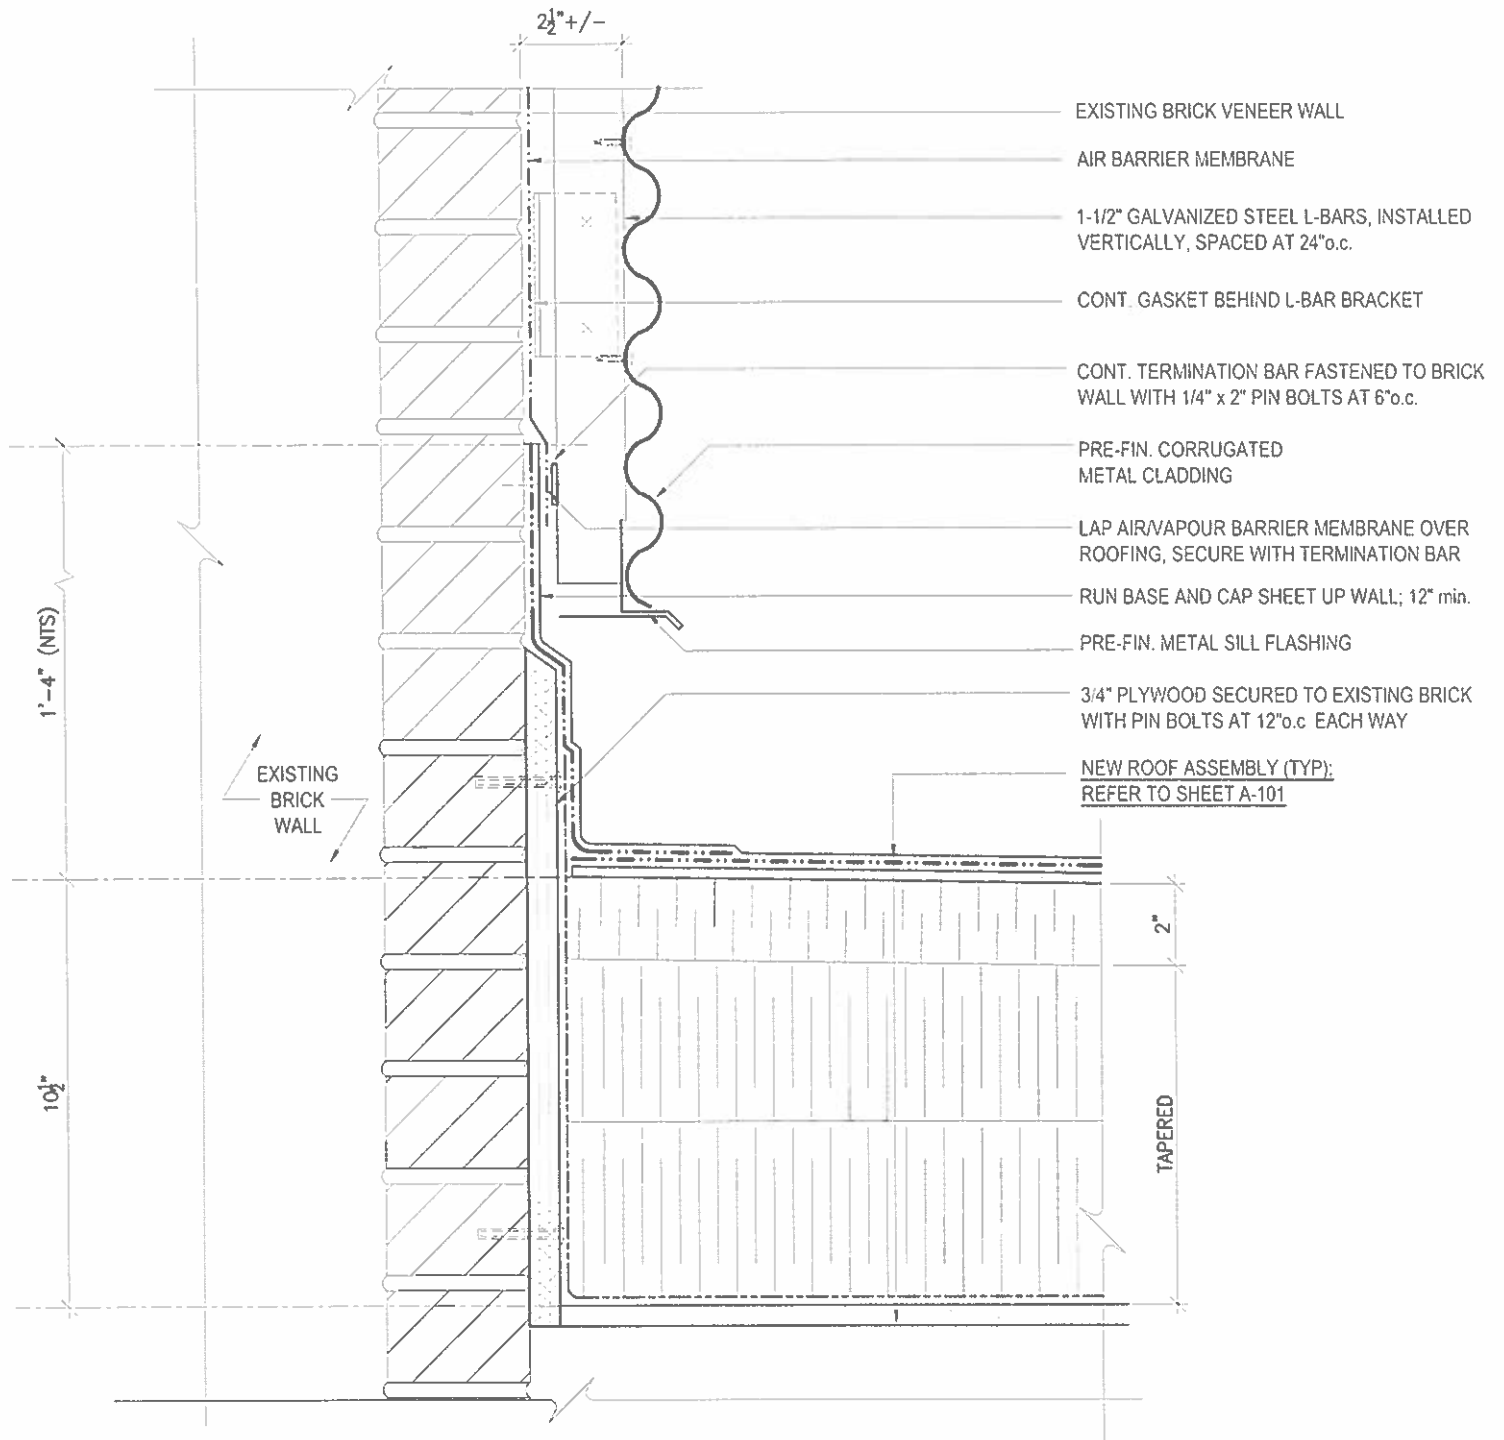


Note: This detail shows horizontal cladding on vertical girts; install vertical cladding on horizontal girts (as shown in CONSTRUCTION PHOTOS)



METAL CLADDING AT BASE OF WALL

SCALE: 3" = 1'-0"

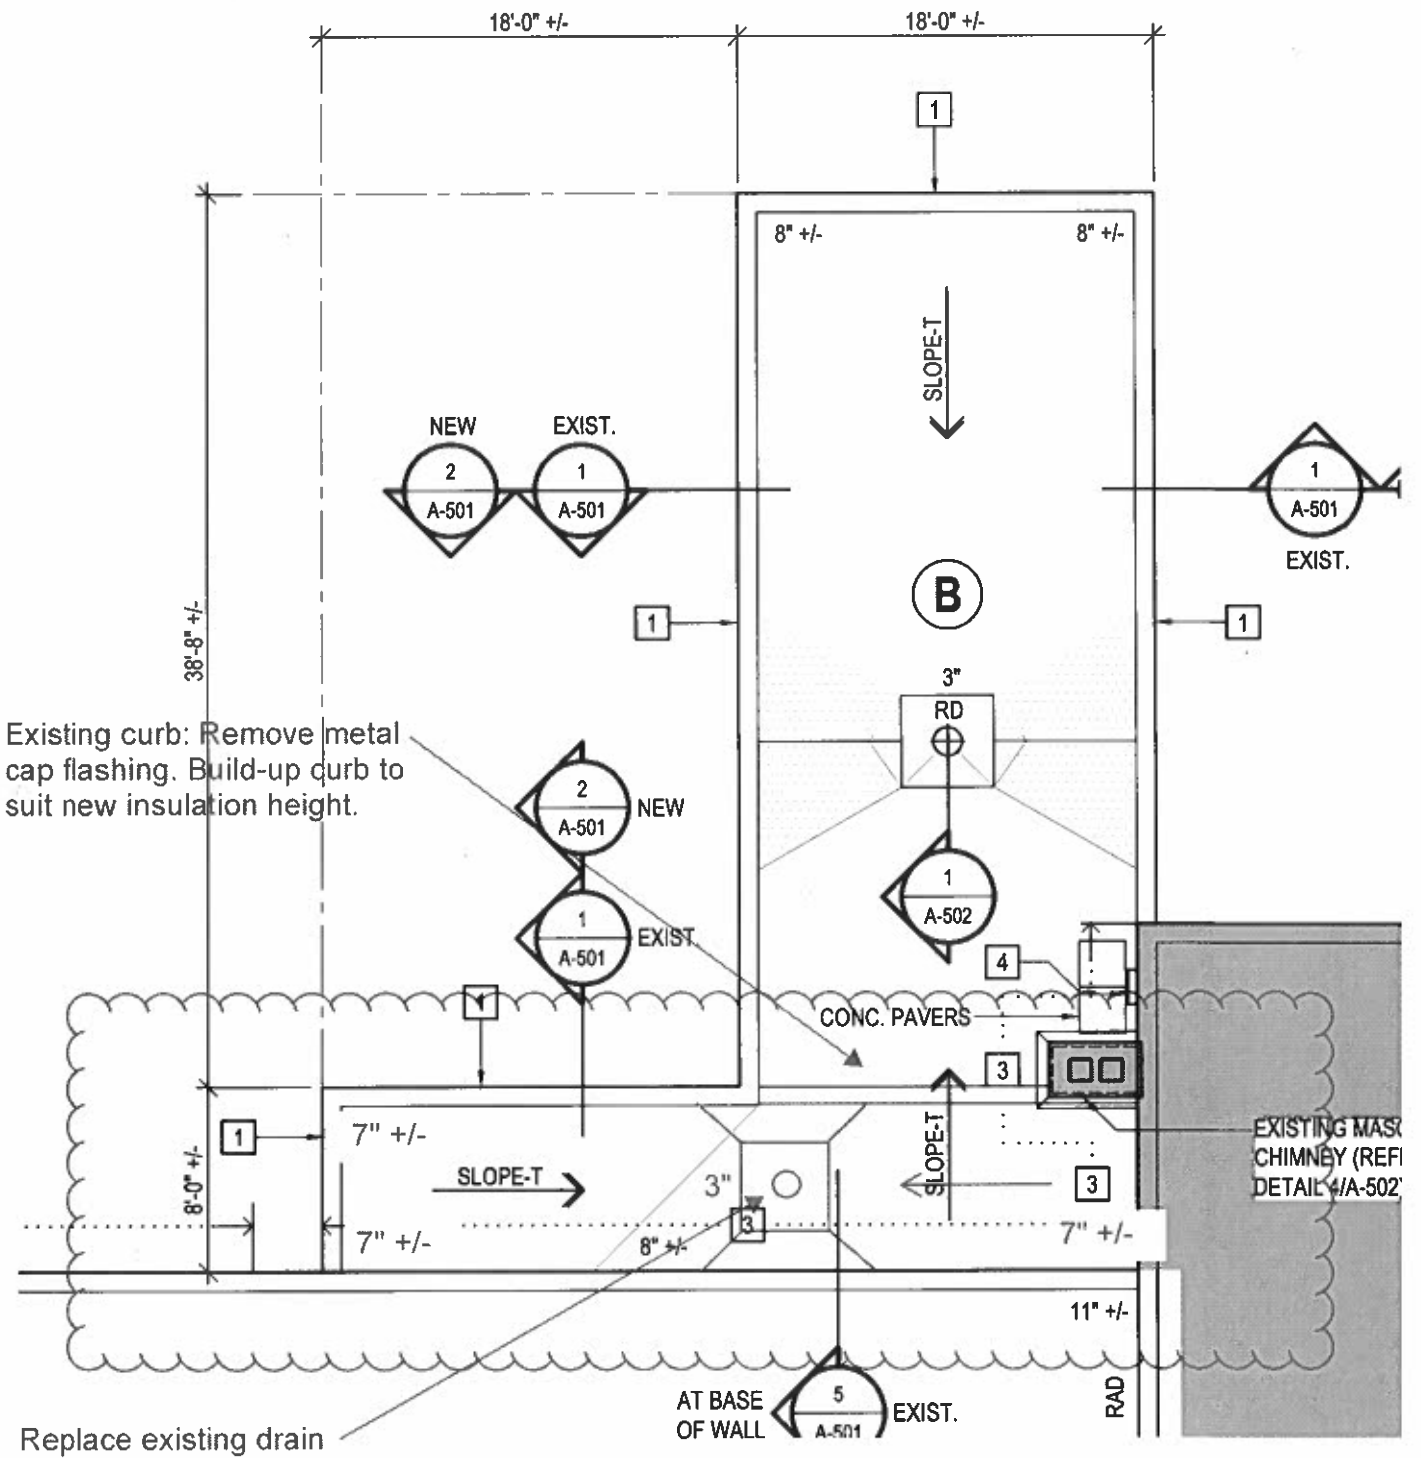

REVISED TAPERED INSULATION



To: *Proposed Bidders*

From: Peter Taylor, Purchasing Manager

Pages 1

Date: July 14, 2022

Re: Addendum 1 RFP 22-05OPP Roof Replacement Thorburn Consolidated School

The following comprises Addendum 1 for the above tender and will form part of the tender documents:

Tremco product Powerply Endure BIO Modified Bitumen Roof Membrane is an acceptable alternate for use in tender RFP 22-05OPP with the following modifications/comments:

- 1. The specified cover board is used, not "BP ESGARD High Density Roof Insulator", as they've indicated.**
- 2. An inter-ply membrane is used, per the specifications (any one of the products listed in the report under the "Ply" section).**
- 3. The corner zones of the roof are mechanically fastened through the base sheet layer (as opposed to adhered), per the specifications.**

This change did not require a revision to the Closing Date and Time.

If there is more than one (1) Addendum issued for this tender, please acknowledge each separately on your tender submission.

If your tender has already been submitted and this addendum changes your original proposal content, revised information can be emailed to tenders@ccrce.ca

If you have any questions, please advise.

Peter Taylor, Purchasing Manager
Chignecto Central Regional Centre for Education
60 Lorne Street
Truro, Nova Scotia
B2N 3K3

